

technical data

Specials

At Bion's, we specialise in providing interrupted perforated patterns, examples of which are shown below.

Figure 1 shows an example of a 'filled in' pattern with external borders and an internal unperforated area.

Figure 2 is the same example but with the pattern not filled in.




Figure 1




Figure 1

The main requirements in determining which pattern to use is hole size and the open area requires, details of which are given for each pattern overleaf. The following formulas can be used to determine free areas.

Round Hole

% FREE AREA = $\frac{1.57D^2}{P(i) P(ii)} \times 100$ for staggered pitch

% FREE AREA = $\frac{0.79 D^2}{P(i) P(ii)} \times 100$ for square/rectangular pitch

Square or Rectangular Hole

% FREE AREA = $\frac{2(W \times L)}{P(i) P(ii)} \times 100$ for staggered pitch

% FREE AREA = $\frac{(W \times L)}{P(i)} \times 100$ for square/rectangular pitch

Various Various Pi

In the interests of continual pattern development, hole size and pitch specifications may vary to that standard

Staggered Pitch

In-Line Pitch

At Bion, we are equipped to perforate a wide range of patterns in a variety of materials including stainless steels, mild and galvanised steels, aluminium, brass and plastic - as well as precoated materials.

In particular we specialise in producing interrupted perforated patterns where plain borders or internal margins are required. e.g. ceiling tiles, exhaust tubes, or cooker grille blanks.

We also concentrate on supplying customers who require fine high quality perforating for decorative products such as speaker grilles where visual appearance is critical.

The patterns included in this data sheet are a selection of the most popular patterns. However we are pleased to work with our customers in developing patterns to meet specific applications.

Should you not be able to find a suitable pattern or require assistance our technical sales department will be pleased to help you.

Technical Specification

		_			
	mm)	Open Area			ation
	eter(en /		:=	n gura
Round	Hole Diameter(mm)	d0 %	Pitch i	Pitch ii	Pattern Configuration
RB1003	1.0	3	4.8	11.2	staggered
RB1046	1.0	46	1.4	2.4	60 degree
RB1211	1.2	11	3.2	3.2	square
RB1225	1.2	25	2.8	3.2	staggered
RB1234	1.2	34	2.1	1.6	rectangular
RB1242	1.2	42	1.7	3.2	60 degree
RB1251	1.2	51	1.4	1.6	rectangular
RB1505	1.5	5	6.0	6.0	square
RB1510	1.5	10	4.0	4.0	square
RB1511	1.5	11 22	5.7	5.7	45 degrees
RB1522 RB1550	1.5 1.5	50	4.0 2.0	4.0 3.5	45 degree 60 degree
RB1703	1.7	3	8.3	8.3	square
RB1711	1.7	11	4.8	8.3	60 degree
RB1715	1.7	15	4.7	7.2	60 degree
RB1745	1.7	45	2.4	4.1	60 degree
RB1810	1.8	10	3.6	7.1	rectangular
RB1820	1.8	20	3.6	3.6	square
RB2014	2.0	14	4.8	4.8	square
RB2016	2.0	16	4.8	8.3	60 degree
RB2021	2.0	21	5.5	5.5	45 degree
RB2031	2.0	31	4.2	2.4	rectangular
RB2047 RB2512	2.0 2.5	47 12	2.8 6.5	4.8 6.5	60 degree square
RB2516	2.5	16	5.5	5.5	square
RB2523	2.5	23	6.5	6.5	45 degree
RB2609	2.6	9	7.6	7.6	square
RB2611	2.6	11	7.6	13.2	60 degree
RB2621	2.6	21	6.6	3.8	rectangular
RB2632	2.6	32	4.4	7.6	60 degree
RB2642	2.6	42	3.3	3.8	rectangular
RB3009 RB3011	3.0	9	8.7	8.7	square
RB3011	3.0 3.0	11 22	8.7 7.5	15.0 4.3	60 degree rectangular
RB3033	3.0	33	5.0	8.7	60 degree
RB3043	3.0	43	3.8	4.3	rectangular
RB3051	3.0	01	4.0	6.9	60 degree
RB3241	3.2	41	4.8	8.2	60 degree
RB3256	3.2	56	4.0	7.0	60 degree
RB3327	3.3	27	6.0	10.4	60 degree
RB3513	3.5	13	8.7	8.7	square
RB3534	3.5	34	5.7	9.9	60 degree
RB3544 RB3709	3.5	44 9	5.0	8.7	60 degree
RB3709 RB3710	3.7 3.7	10	11.2 11.2	11.2 19.4	square 60 degree
RB3730	3.7	30	6.5	11.2	60 degree
RB3739	3.7	39	4.9	5.6	rectangular
RB3740	3.7	40	5.6	9.7	60 degree
RB4013	4.0	13	10.4	18.0	60 degree
RB4040	4.0	40	6.0	10.4	60 degree
RB4058	4.0	58	5.0	8.7	60 degree
RB4515	4.5	15	18.9	10.9	60 degree
RB4546	4.5	46	6.3	10.9	60 degree
RB4814	4.8	14 17	11.2	11.2	square 60 degree
RB4817 RB4850	4.8 4.8	50	11.2 6.5	19.4 11.2	60 degree 60 degree
RB5035	5.0	35	8.0	13.9	60 degree
RB5067	5.0	67	5.8	10.1	60 degree
RB6412	6.4	12	16.0	16.0	square

Round & Square RB6414 RB6443 RB6457 RB6458	0.4 Hole Diameter(mm)	% Oben Area 57 58	16 9.2 6.9 7.9	27.7 16.0 8.0 13.7	60 degree rectangular 60 degree
RB8023	8.0	20	16.0	16.0	square
RB8068	8.0	23 68	16.0 9.2	27.7 16.0	60 degree 60 degree
	Width	% Open Area	Pitch i	Pitch ii	Pattern Configuration
RBS2011	2.0 x 2.0	11	6.0	6.0	square
RBS2028	2.0 x 2.0	28	4.8	6.0	staggered
RBS2044	2.0 x 2.0	44	3.0	3.0	square
RBS4735	4.7×4.7	35	8.0	8.0	square
RBS6010	6.0×6.0	10	15.2	45.6	staggered
RBS6016	6.0 x 6.0	16	15.2	15.2	square
RBS6052	6.0 x 6.0	52	9.1	15.2	staggered
RBS6062	6.0 x 6.0	62	7.6	7.6	square
RBS6408	6.4 x 6.4	8	25	19.1	rectangular
RBS6445	6.4 x 6.4	45	9.5	9.5	square
RBS10015A	10.0×10.0	15	26.0	52.0	staggered
RBS10015	10.0×10.0	15	26.0	26.0	square
RBS10044	10.0×10.0	44	17.3	26.0	staggered
RBS10059	10.0 x 10.0	59	13.0	13.0	square

rectangular & hexagonal	Width Length	% Open Area	Pitch i	Pitch ii	Pattern Configuration
RBR0918	0.9 x 2.3	16	6.0	2.0	rectangular
RBR2440	2.4 x 12.7	40	15.1	9.5	staggered
RBR2434	2.4 x 12.7	34	15.1	4.8	rectangular
RBH6079	6.0 across flat	79	6.8	11.7	60 degree












Robert Bion & Co Ltd
Portman Road,
Reading, Berks RG30 1LZ
Telephone 0044 (0)1189 592700
Fax: 0044 (0)1189 592701
Email: sales@bion.co.uk
www.bion.co.uk

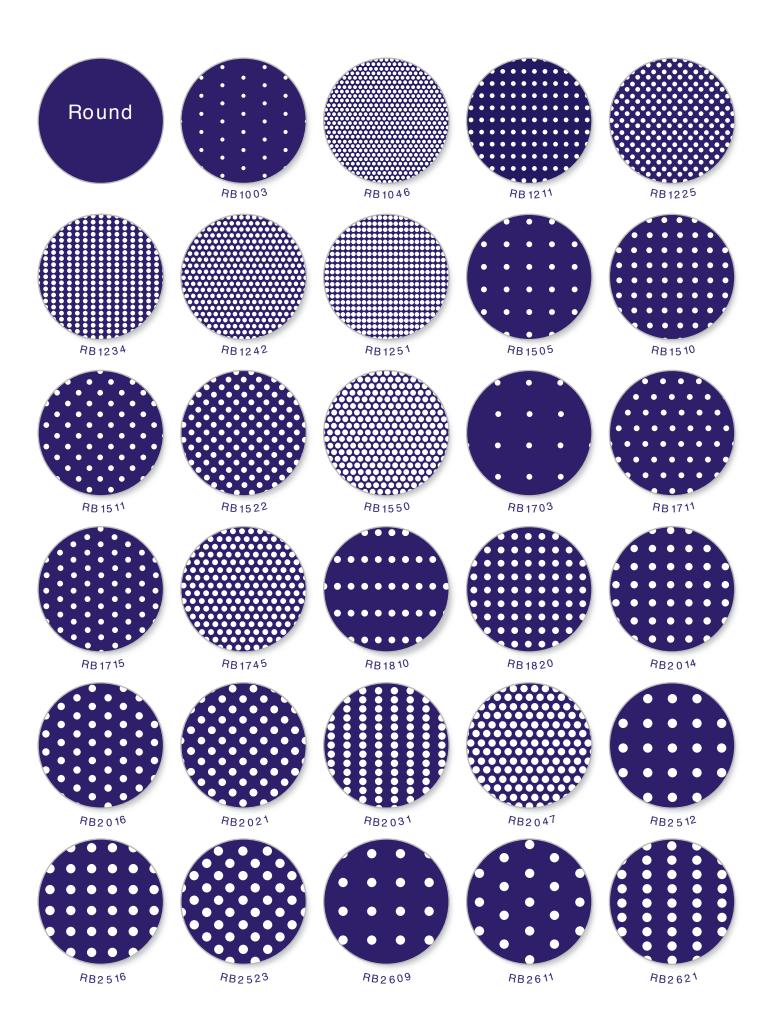

Scale 1:1

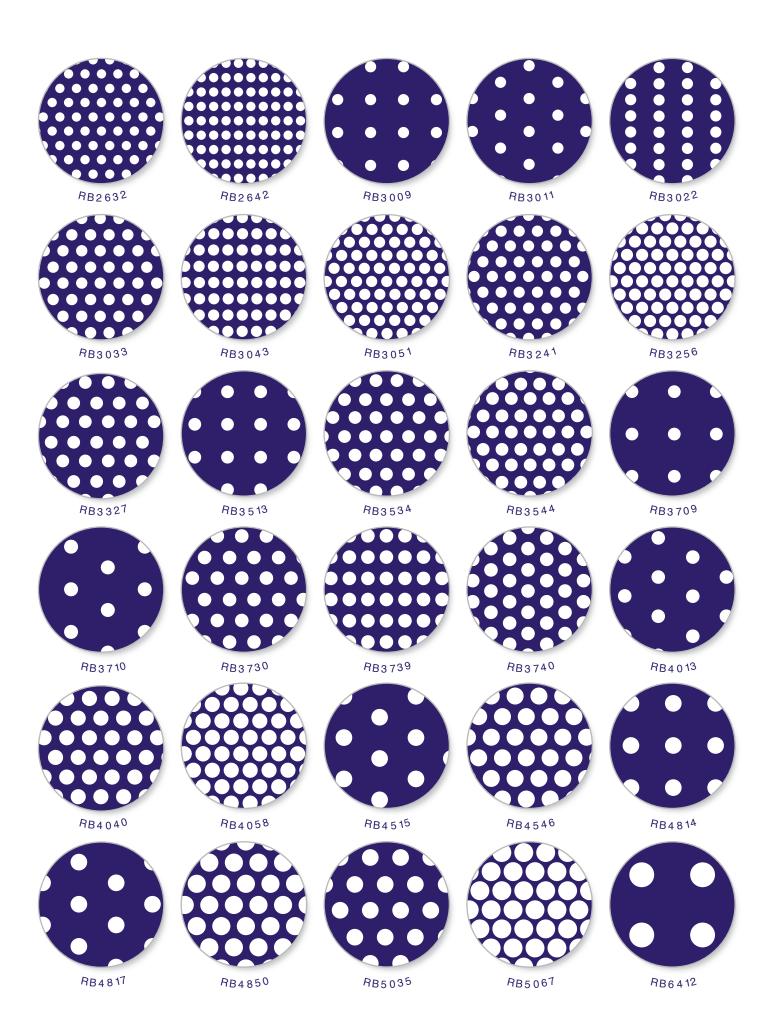

Scale 1:1

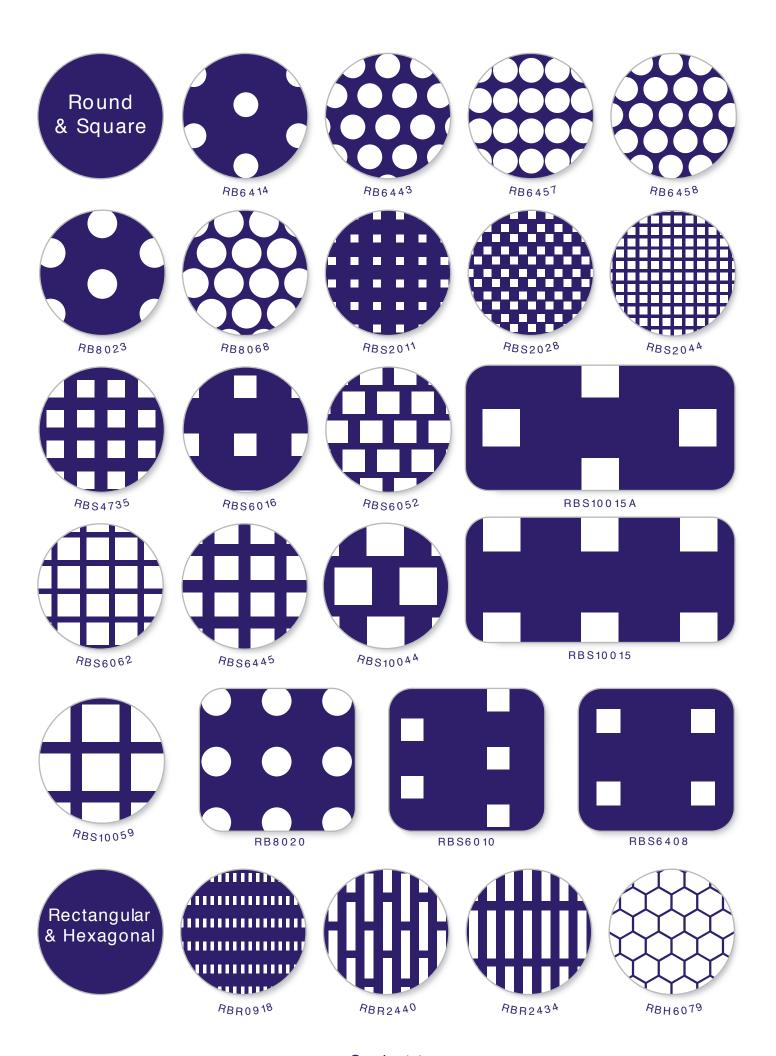

Scale 1:1